

Technical Specifications

MOBOTIX MOVE 3MP Speed Dome IR Light Camera

The MOBOTIX MOVE 3MP Speed Dome IR Light Camera is much more than just standard: The extremely fast panning and tilt technology with powerful, long-lasting and at the same time energy-saving electric motors obtains the desired results more quickly. Clear images, even at the highest zoom level and under any lighting conditions, are also a part of our Premium PTZ camera's seamless, complete range of features.

- Servo Feedback No Drifting
- WDR up to 120 dB
- Electronic Image Stabilizer (EIS)
- H.264/H.265/MJPEG Simultaneous Streaming
- IR LEDs (working distance up to 200 m/656 ft)
- Triple power (UPoE/DC12 V/AC24 V)
- IP66/IK10 (housing only)
- ONVIF Profile S/G/T Support
- Temp. Range –55 to 55 °C/-67 to 131 °F with heater
- 3D Motion Compensated Noise Reduction (MCTF)
- Smart Event Functions

- Text Overlay and Privacy Masks
- Smart Low Bitrate Control
- Triple Stream Support
- RS485 Support
- Up to 40x Optical Zoom
- Auto Object Tracking



MOBOTIX MOVE

MOBOTIX MOVE 3MP Speed Dome IR Light Camera

Remotely Upgradable Firmware

The firmware of the MOBOTIX MOVE 3MP Speed Dome IR Light Camera can be upgraded remotely. This applies to the IP system and the pan/tilt/zoom block. This feature instantly adds new features and greatly reduces maintenance costs.

Servo Feedback

The MOBOTIX MOVE 3MP Speed Dome IR Light Camera features **Servo Feedback** technology. When encountering external force, such as vandalism or vibration, the PTZ immediately returns to its original position.



Product Information

| Product Name | 3MP Speed Dome IR Light Camera |
|--------------|--------------------------------|
| Order Code | Mx-SD1A-340-IR |

Image Quality

| Image Sensor | 3MP 1/2.8" Progressive CMOS |
|-------------------------|-----------------------------|
| Effective (Used) Pixels | H x V = 2065x1553 (3MP) |
| Pixel Size | 2.5 μm |
| Frame Rate (maximum) | WDR on/off: |
| | H.265/H.264: 3MP@30 fps |
| | MJPEG: 1080p@30fps |

Lens

| Minimum Illumination | Color: 0.04 lux B/W: 0.002 lux |
|----------------------|--|
| Lens Characteristics | Motorized Lens: Zoom, Focus, P-IRIS, Auto-IRIS Focal Length: 4.3 to 170 mm |
| | Aperture: F1.6 Horizontal Field of View: 63.7° (Wide), 1.7° (Tele) Vertical Field of View: 49.2° (Wide), 1.3° (Tele) |

Camera

| Servo Feedback | Yes (see Servo Feedback, p. 2) |
|-----------------------------------|--|
| Image Rotation | 90°, 180°, 270° |
| Image Settings | Color, Brightness, Sharpness, Contrast, White Balance, Exposure Control, 2DNR, 3DNR, NR by Motion, Masking, Text Overlay |
| Zoom | Optical: 40x, Digital: 10x |
| Auto Object Tracking | On/off |
| Electronic Image Stabilizer (EIS) | Yes |
| WDR | Up to 120 dB |
| Shutter Priority Mode | Up to 1/45 s |
| Shutter Time | 1 to 1/10000 s |
| Day/Night | Automatically switchable IR-cut filter |

PTZ Features

| Preset positions | Up to 256 positions, 1 Home position |
|------------------|---|
| Sequences | Up to 8 sequences with 64 preset positions each |
| Cruise Paths | Up to 8 |
| Auto Pan Paths | Up to 4 |

Technical Specifications

MOBOTIX MOVE 3MP Speed Dome IR Light Camera

| Display Position | Pan/Tilt degrees can be displayed in live image |
|--------------------------|--|
| Pan Range | 360° endless |
| Tilt Range | -20° to +100° |
| Pan Speed | Manual Pan Speed: 0.1°–90°/s Preset Pan Speed: 300°/s |
| Tilt Speed | Manual Tilt Speed: 0.1°–55°/s Preset Tilt Speed: 300°/s |
| Joystick/Keyport Control | RS485 protocols DSCP, Pelco-D and Pelco-P |

Video Codec

| Compression/Encoding | H.265/H.264/MJPEG |
|----------------------|--|
| Streaming | Up to 3 individually configurable streams in H.264/H.265/MJPEG. |
| | Configurable resolution, frame rate, bandwidth LBR/VBR/CBR in H.265/H.264. |

Audio Codec

| Compression/Encoding | G.711/G.726/AAC/LPCM |
|----------------------|--|
| Streaming | Two-way Configurable resolution, frame rate, bandwidth LBR/VBR/CBR in H.265/H.264. |
| Audio Input | Line In |
| Audio Output | Line Out |

Cyber Security Features

| Password Protection | Yes |
|--|-----|
| IP address filtering | Yes |
| IEEE 802.1X network access control | Yes |
| Digest authentication | Yes |
| AES encryption for password protection | Yes |
| SNMP, TLS, HTTP, HTTPS | Yes |

| User and Group Management | Yes |
|----------------------------|-----|
| SSL connections | Yes |
| VPN | Yes |
| Digital image signature | Yes |
| RSA encryption (2048 bits) | Yes |

Network

| Interface | 10/100 Mbps Ethernet |
|---------------------|---|
| Supported Protocols | ARP, PPPoE, IPv4/v6, ICMP, IGMP, QoS, TCP, UDP, DHCP, UPnP, SNMP, SMTP, RTP, RTSP, HTTP, HTTPS, FTP, NTP, DDNS, SMBv2 |
| ONVIF conformance | Supports profiles S/G/T |
| Supported Browsers | All current browsers are supported. |

System Integration

| Base Video Analytics | Motion detection, audio detection |
|----------------------|---|
| Event Triggers | ■ External Input |
| | Analytics |
| | Network failure detection |
| | Periodical event |
| | Manual trigger |
| Event Actions | External output activation |
| | Video and audio recording to edge storage |
| | File upload: FTP, network share and email |
| | Notification: HTTP, FTP, email |

General

| Housing material | Metal and plastic | |
|--------------------|----------------------------------|--|
| Power Requirements | Forced 4-pair UPoE, max 39.60 W | |
| | AC24V, max 44.00 W, max 64.90 VA | |

Technical Specifications

MOBOTIX MOVE 3MP Speed Dome IR Light Camera

| PoE Modes Supported | Mode A and Mode B required | |
|-----------------------------------|--|--|
| Connectors | RJ45 4 x Alarm in, 2x Alarm out terminal block DC 12 V terminal block AC 24 V terminal block Audio In terminal block Audio Out terminal block CVBS connector (available with max. 2 activated streams) RS485 terminal block | |
| IR Illumination | 850 nm; up to 200 m distance depending on scenery reflection | |
| Video Storage | Micro SD/SDHC/SDXC card support up to 1 TB, Support for recording to NAS, MOBOTIX HUB, MOBOTIXMOVE NVR | |
| Remotely Upgradable | Yes (see Remotely Upgradable Firmware, p. 2) | |
| Environmental Protection Class | IP66/IK10 (housing only) | |
| Operating Temperature | –55 to 55 °C/-67 to 131 °F with heater | |
| Relative Humidity | 10 to 90 % non-condensing | |
| Storage Conditions | –20 to 70 °C/–4 to 158 °F | |
| Approvals | EMC: CE/FCC, Safety: LVD, Environmental: IP66 | |
| Warranty | 5 years | |
| Dimensions | ø 207.4 x 300.4 mm | |
| Weight | 3400 g | |

NOTE! Observe the MOBOTIX MOVE Installation Hints document to ensure optimum performance of the camera features.

Alarm Input/Output Current and Voltage

| Alarm In | Alarm Out |
|--------------------------------------|---------------------|
| 5 V with 10 $k\Omega$ pull up, 50 mA | 400 V DC/AC, 120 mA |

DORI Specifications

In the video surveillance context, "DORI" stands for Detection, Observation, Recognition and Identification and is based on IEC EN62676-4: 2015. These levels define the minimum pixels that a face of a person must have to provide proper identification, for example.

- **Detection:** Up to this distance, you can reliably determine if a person or vehicle is present.
- **Observation:** Up to this distance, you can see characteristic details of an individual, such as distinctive clothing.
- **Recognition:** Up to this distance, you can determine with a high degree of certainty whether an individual is the same as someone that has been seen before.
- Identification: Up to this distance, you can determine the identity of an individual beyond reasonable doubt.

| DORI Level | Detection | | Observation | | Recognition | | Identification | |
|------------|-----------|---------|-------------|---------|-------------|---------|----------------|--------|
| Camera | Wide | Tele | Wide | Tele | Wide | Tele | Wide | Tele |
| Mx-SD1A- | 72 m/ | 2708 m/ | 28 m/ | 1075 m/ | 14 m/ | 542 m/ | 7 m/ | 271 m/ |
| 340-IR | 236 ft | 8885 ft | 92 ft | 3527 ft | 46 ft | 1778 ft | 23 ft | 889 ft |

Accessories

| Picture | Order Code | Description |
|---------|---------------|---|
| | Mx-M-SD-C | Corner Mount for MOBOTIX MOVE SpeedDome models (only in combination with SpeedDome Wall Mount Mx-M-SD-W/WM) |
| | Mx-M-SD-GN | Parapet Mount (Gooseneck) with integrated junction box for MOBOTIX MOVE SpeedDome models |
| | Mx-M-SD-P | Pole Mount for MOBOTIX MOVE SpeedDome models (only in combination with SpeedDome Wall Mount Mx-M-SD-W/WM) |
| | Mx-M-SD-PM | Pendant Mount Kit 25 cm for MOBOTIX MOVE SpeedDome models |
| | Mx-M-SD-PMEXT | Pendant mount extension 25 cm for use with Pendant Mount Kit Mx-M-SD-PM |
| | Mx-M-SD-W | Wall Mount for MOBOTIX MOVE SpeedDome models; can be combined with Pole Mount Mx-M-SD-P or Corner Mount Mx-M-SD-C |
| | Mx-M-SD-WM | Wall Mount with room for optional junction box Mx-M-SD-WMJB for MOBOTIX MOVE SpeedDome models |
| | Mx-M-SD-WMJB | Wall Mount Junction Box for MOBOTIX MOVE SpeedDome models |

Technical Specifications MOBOTIX MOVE 3MP Speed Dome IR Light Camera

| Picture | Order Code | Description |
|---------|---------------------|--|
| | Mx-NPA-UPOE1A-60W | UPoE Network Power Injector 60 W |
| | Mx-A-ETP1A-2601-SET | Media Converter Set Ethernet (PoE+) – Twisted-Pair |

Dimensions

NOTE! Download the drilling template from the section or on the MOBOTIX website: **www.mobotix.com** > **Support** > **Download Center** > **Marketing & Documentation** > **Drilling Templates**.

CAUTION! Always print or copy the drilling template at 100% of the original size!

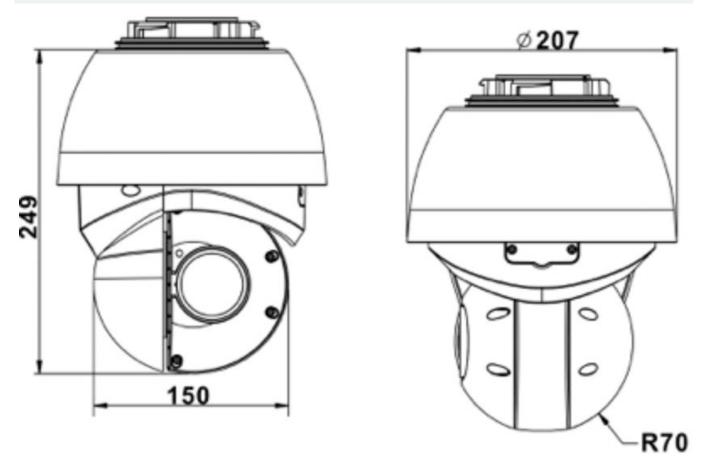


Fig. 1: 3MP Speed Dome IR Light Camera: All measurements in mm

Further Reading





EN_02/23